GraySparks Ltd.

QUOTATION

IKEA Kitchen Dry Fit

QUOTE NUMBER	DATE OF QUOTE	VALID UNTIL	CUSTOMER
GS-072	16 October 2026	30 October 2026	Azir Uddin 65 Swallow Close, Erith DA8 3PD

Labour-only dry fit of a customer-supplied IKEA METOD galley kitchen, as shown on the attached IKEA plan and elevation drawings and site photos. Works carried out in **November 2026**, dates agreed on acceptance. Approx. 3 working days. All prices in pounds sterling (GBP).


AREA 1 · UNITS & CARCASSES (PER IKEA PLAN, ATTACHED)		
Assemble remaining carcasses; check and complete those already built	*incl.*	
Wall units hung on rail, set level and tight to the line; tall fridge/freezer housing fixed	*incl.*	
Base units levelled, tied together and fixed; plinths, fillers and cornice scribed to walls and floor	*incl.*	
Doors, drawer fronts and handles fitted and aligned	*incl.*	
AREA 2 · WORKTOP & SINK		
Customer-supplied timber/laminate worktop cut, scribed and joined at the corner return	*incl.*	
Cutout for KILSVIKEN inset sink (art. 606.078.78) to template; sink set in place ready for plumber	*incl.*	
LABOUR		
Build days at standard day rate: units assembled and fitted, worktop cut and sink cutout	*3 × £450*	£1,350
Pre-start visit to check walls and confirm dimensions	*no charge*	£0
MATERIALS		
Sundries allowance: wall fixings, packers, silicone, blades and consumables. Supplied at cost, receipts available	*allowance*	£150
TOTAL (GBP)		**£1,500**

TOTAL	DEPOSIT ON ACCEPTANCE	BALANCE ON COMPLETION
£1,500	£350	£1,150

PAYMENT TERMS

- Deposit of £350 is due on receipt of the deposit invoice, issued on acceptance. It locks in the November dates exclusively for this job and confirms both sides are committed (see Booking & deposit overleaf).
- Balance due on receipt of the final invoice, issued on completion.
- Preferred payment: bank transfer or cash. Bank details are overleaf and on every invoice.

GraySparks Ltd.

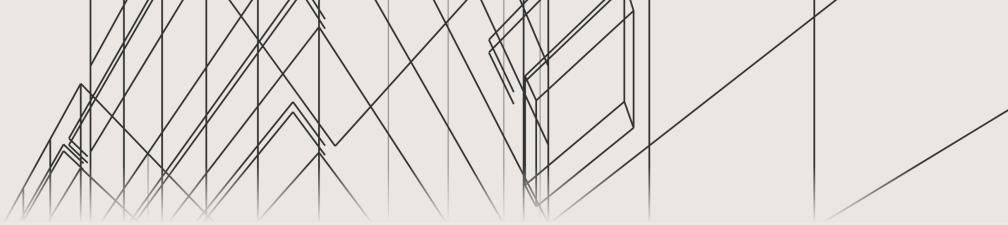

BOOKING & DEPOSIT

- The deposit confirms a firm booking, so neither of us spends time on visits, planning or ordering that goes nowhere.
- Once it's received, the November dates are held for you and no other job is booked into them.
- November is mostly free for now, but work is picking up fast after the usual summer lull. Without a deposit the dates can't be held, and a slot given away is a start date pushed back for everyone.
- If the dates need to move, I'll agree new ones with you in good time. The deposit carries over.

PAYMENT DETAILS

ACCOUNT NAME	SORT CODE	ACCOUNT NUMBER	REFERENCE
GraySparks Ltd	30-54-66	14102562	GS-072

INCLUDED

- All carpentry and fitting for the two areas itemised, including fixings and consumables.
- Protection of adjacent finishes and a daily tidy.
- Fully insured.

EXCLUDED

- All plumbing: sink, tap, waste and appliance connections (by others).
- All gas work, including the cooker, which needs a Gas Safe engineer.
- All electrical work (by others): socket and switch moves, extractor hood, appliance supplies.
- Making good the walls behind the units (patching, plastering, tiling or splashback). To be assessed at the visit and quoted separately if needed.
- Supply of units, fronts, worktop, sink and handles. Quartz or stone worktop, which needs a fabricator to template and cut.
- Flooring, decoration and removal of packaging and waste.

ADDITIONAL NOTES

- Units, fronts, worktop and sink to be on site before the first build day.
- Additional time: a fourth day is held in the diary as contingency and is only charged if it's needed. Should anything unexpected come up, such as the wall condition or out-of-square walls, I'll talk it through with you first, and any extra day is agreed in advance at a reduced rate of £400.
- Client to ensure access to the property at agreed times.
- Changes to scope after acceptance are quoted separately before proceeding.
- All work carried out in accordance with current regulations.

CUSTOMER ACCEPTANCE

I confirm that I agree to the terms of this quote and authorise GraySparks Ltd. to proceed with the outlined work.

Signature:
Date:
GraySparks Ltd.

Signature:
Date:
For Azir Uddin