GraySparks Ltd.

QUOTATION

Fire Door Trim & Fit

QUOTE NUMBER	DATE OF QUOTE	VALID UNTIL	CUSTOMER
GS-073	20 October 2026	3 November 2026	Bridget RM3 8HE, Harold Hill

Labour-only trim and fit of five customer-supplied new internal fire doors to the existing frames at the address above. Works carried out as soon as possible, dates agreed on acceptance. Approx. 2 working days. All prices in pounds sterling (GBP).


AREA 1 · DOORS & FRAMES (5 DOORS)		
Each door trimmed to fit its frame, within the manufacturer's permitted limits	*incl.*	
Hinge recesses routed in doors and frames; customer-supplied fire-rated hinges fitted	*incl.*	
Seal grooves cut; customer-supplied intumescent and smoke strips fitted	*incl.*	
AREA 2 · HANGING, LATCHES & HANDLES		
Doors hung and gaps set; checked for free swing and positive latching	*incl.*	
Latch and handle holes cut; customer-supplied latches and handles fitted	*incl.*	
LABOUR		
Fire door trim and fit: trimmed, routed, hung and furnished	*5 × £140*	£700
Pre-start visit to check frames and confirm dimensions	*no charge*	£0
MATERIALS		
Fixings, packers and consumables included. Doors, hinges, strips, latches and handles supplied by the customer	*incl.*	£0
TOTAL (GBP)		**£700**

TOTAL	DEPOSIT	DUE ON COMPLETION
£700	None	£700

PAYMENT TERMS

- No deposit is needed for this job. The full £700 is due on receipt of the final invoice, issued on completion.
- Preferred payment: bank transfer or cash. Bank details are overleaf and on every invoice.

GraySparks Ltd.

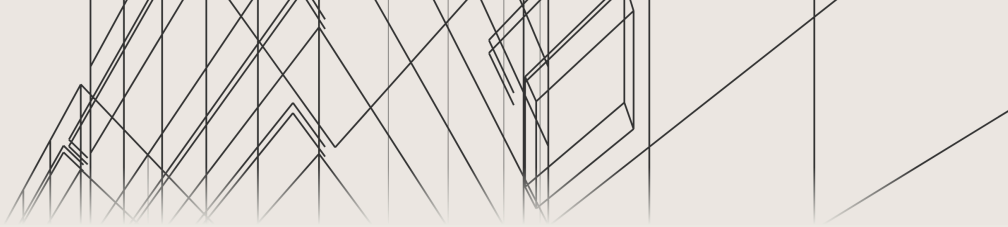

PAYMENT DETAILS

ACCOUNT NAME	SORT CODE	ACCOUNT NUMBER	REFERENCE
GraySparks Ltd	30-54-66	14102562	GS-073

INCLUDED

- All carpentry and fitting for the five doors itemised, including fixings and consumables.
- Protection of adjacent finishes and a tidy at the end of each day.
- Fully insured.

EXCLUDED

- Frame repairs, replacement frames, new stops or packing out of square frames. To be assessed at the visit and quoted separately if needed.
- Architraves, door closers and signage.
- Supply of doors, hinges, seals, latches and handles.
- Painting, decoration, flooring, and removal of packaging and waste.

ADDITIONAL NOTES

- Doors, fire-rated hinges, intumescent and smoke strips, latches and handles to be on site before work starts.
- Doors are trimmed only within the limits on the manufacturer's label or datasheet. If a door can't be made to fit within those limits, I'll tell you before anything is cut.
- Quoted on the basis that the frames are in good condition and square. Should anything unexpected come up, I'll talk it through with you first, and any extra work is agreed in advance before I start.
- Client to ensure access to the property at agreed times.
- Changes to scope after acceptance are quoted separately before proceeding.
- All work carried out in accordance with current regulations.

CUSTOMER ACCEPTANCE

I confirm that I agree to the terms of this quote and authorise GraySparks Ltd. to proceed with the outlined work.

Signature:

Date:

GraySparks Ltd.

Signature:

Date:

For Bridget