GraySparks Ltd.

QUOTATION

Door Closers

QUOTE NUMBER	DATE OF QUOTE	VALID UNTIL	CUSTOMER
GS-076-V1	21 October 2026	4 November 2026	Bridget RM3 8HE, Harold Hill

Labour-only fitting of customer-supplied door closers to five fire doors and two bathroom doors, as an addition to quote GS-076 (£700). Works carried out on the same visit as the door fitting. All prices in pounds sterling (GBP).


AREA 1 · FIRE DOORS (5)		
Overhead closer fitted to each fire door, fixed to door and frame to the closer's instructions	*incl.*	
Closing speed and latching action set so each door closes fully from any angle	*incl.*	
AREA 2 · BATHROOM DOORS (2)		
Closer fitted to each bathroom door and adjusted to close and latch	*incl.*	
LABOUR		
Fire door closers: fitted and adjusted	*5 × £60*	£300
Bathroom door closers: fitted and adjusted	*2 × £40*	£80
MATERIALS		
Closers supplied by the customer. Fixings and consumables included	*incl.*	£0
TOTAL (GBP)		**£380**

TOTAL	DEPOSIT	DUE ON COMPLETION
£380	None	£380

PAYMENT TERMS

- No deposit is needed. The £380 is due on receipt of the final invoice, issued on completion, together with the £350 balance on GS-076.
- Preferred payment: bank transfer or cash. Bank details are overleaf and on every invoice.

GraySparks Ltd.

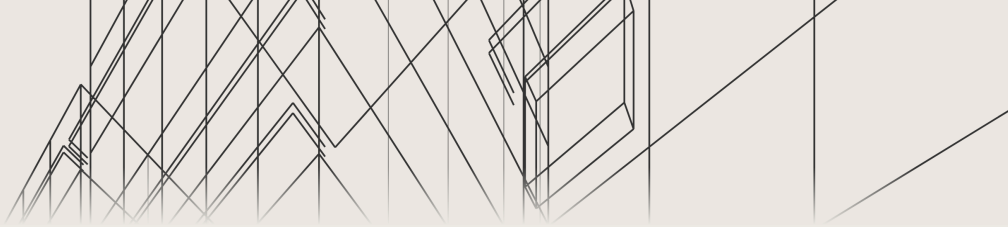

PAYMENT DETAILS

ACCOUNT NAME	SORT CODE	ACCOUNT NUMBER	REFERENCE
GraySparks Ltd	30-54-66	14102562	GS-076

INCLUDED

- Fitting and adjustment of seven closers: five on fire doors, two on bathroom doors.
- Fixings and consumables.
- Protection of adjacent finishes and a tidy at the end of each day.
- Fully insured.

EXCLUDED

- Supply of the closers.
- Concealed or jamb-mounted closers, which need recesses cutting. Quoted separately if wanted.
- Painting, decoration and making good of old fixing holes.
- Any doors not listed above.

ADDITIONAL NOTES

- Closers on the fire doors must be Certifire approved and CE-marked to EN 1154 Grade 1, power size 3 or above, with no hold-open arm. Please check the model before ordering, as it affects the fire rating.
- Bathroom doors are not fire doors. Closers for these should suit the weight of the door.
- Closers to be on site before work starts.
- Should anything unexpected come up, I'll talk it through with you first, and any extra work is agreed in advance.
- Client to ensure access to the property at agreed times.
- Changes to scope after acceptance are quoted separately before proceeding.
- All work carried out in accordance with current regulations.

CUSTOMER ACCEPTANCE

I confirm that I agree to the terms of this quote and authorise GraySparks Ltd. to proceed with the outlined work.

Signature:

Date:

GraySparks Ltd.

Signature:

Date:

For Bridget